




Saturn Series 8 High Bay / Flood Light 96

Typical applications include:

- Area flood lighting
- Security lighting
- Crane & dock locations

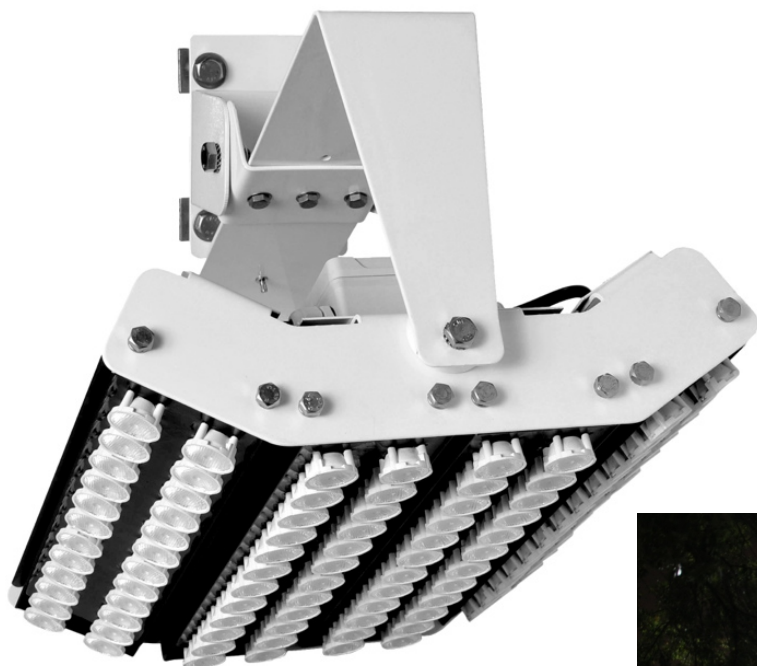


constellation
LIGHTING UK & EUROPE



Constellation Lighting Ltd Unit 1, Holbrook Industrial Estate, Halfway, Sheffield S20 3FG
T + 44 (0)114 2479900 F + 44 (0)114 247835 | www.constellationlighting.eu

technical specifications

Saturn Series 8 High Bay / Flood 96 XPE/XPG

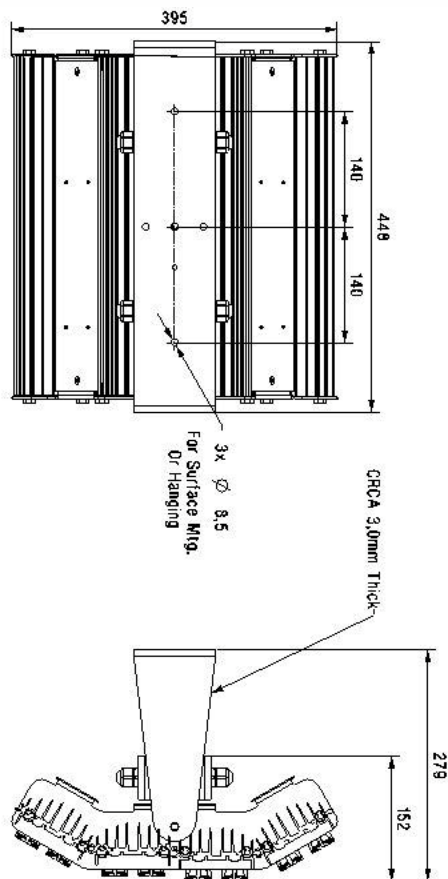

Input Voltage	100 - 277v 50/60Hz Option voltage 480v
Operating Temperature	-30° C to 50 ° C
Ingress Protection	IP65
Colour Temperature	5800K
Colour Rendering Index	>80
Lifespan	Typically 80,000 hrs*
Total Power Consumption	XPG 200W (16,000lm) XPE 140W (11,800lm)
Power Factor	>0.9
Safety Standard	EN60598
EMC/ EMI Standard	EN 61547 / EN55015
Harmonics	EN61000-3-2 and 61000-3-3
Number of LED's	96

Distributed by:



011 (281) 882-8300
www.sourceiex.com

* LED life is quantified by acuity depreciation which typically occurs after 50,000 + hours.

Constellation Lighting reserves the right to alter product offerings and specifications at any time without notice. This publication may include technical inaccuracies.