



Venus Series 8 Light Panel 42W

Typical applications include:

Offices, banks & hotels
Hospital & clinical lighting
Classroom illumination
Retail showrooms




constellation
LIGHTING UK & EUROPE



Constellation Lighting Ltd Unit 1, Holbrook Industrial Estate, Halfway, Sheffield S20 3FG
T + 44 (0)114 2479900 F + 44 (0)1142478351 www.constellationlighting.eu

technical specifications

Venus Series 8 LED Light Panel 42W

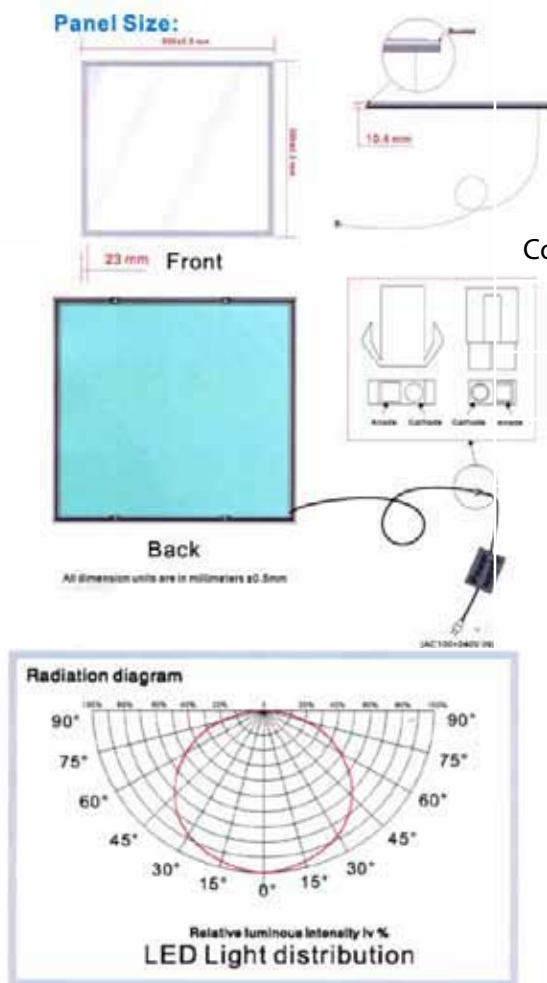

Input Voltage	100 - 240v AC 50 / 60 Hz
Operating Temperature	-10° C to 65 ° C
Ingress Protection	IP20
Colour Temperature	4500/6300K
Luminous Flux	3000
Colour Rendering Index	>80
Fitting lifespan	80,000 hrs*
Power Factor	>0.9
Safety Standard	EN60598
EMC/ EMI Standard	EN 61547 / EN55015
Harmonics	EN61000-3-2 and 61000-3-3
Emergency Back-up	Optional
Number of LED's	100
Total Wattage	42W

Distributed by:



011 (281) 882-8300
www.sourceiex.com

* LED life is quantified by equity depreciation which typically occurs at 50,000 + hours.

Constellation Lighting reserves the right to alter product offerings and specifications at any time without notice. This publication may include technical inaccuracies.