

PLUGS AND SOCKETS

The complete range of industrial strength IP 66 rated plugs and sockets

PLUGS AND SOCKETS



Contents

Industrial Plugs and Sockets

ISO Introduction


3

Straight Plugs / Angled Plugs


4

Combination Switched Outlets


5

Surface Switches


6

Socket Outlets


7

Switched MOD6 RCD Protected Combinations


9

Switched Din-Safe RCD Protected Combinations


10

MOD6 RCD Protected Outlets


11

Din-Safe RCD Protected Outlets


12

RCD Covers & Accessories


13

ISO Technical Data


14

DeconnectorTM Plugs and Sockets

Proconnect Introduction


16

16 A Plugs and Sockets (3PS Series)


17

32 A Plugs and Sockets (3PS Series)


18

63 A Plugs and Sockets (3PS Series)


19


100 A Plugs and Sockets (3PS Series)


20

160 A Plugs and Sockets (3PS Series)


21

Proconnect Technical Data


22

Proconnect Cross Reference Charts


24

Available from
Authorised
Electrical
Wholesalers

Prices shown in published catalogues or price lists are recommended selling prices only and there is no obligation on the part of any reseller to maintain the same prices. Prices are subject to change without notice and all orders are accepted by the Company on the condition that they will be invoiced at the prices ruling at the date of despatch.

Prices are nett unless otherwise stated, are shown in Australian Dollars, are valid only for sales within Australia and are subject to GST.

Products offered for sale in this price list are subject to our standard Conditions of Sale, applicable at the date the order is placed. NHP standard Conditions of Sale can be viewed on our website at www.nhp.com.au/cos conditions or by requesting a copy from any NHP office.

NHP has a policy of continuous product improvement and we reserve the right to alter any product at any time without notice. All detail is subject to change without notice and should be confirmed at the time of purchase. All price lists and quotations are issued on an Errors & Omissions Excepted basis (E&OE).

ISO Industrial Plugs and Sockets

PLUGS Features and Benefits



The Industrial Strength Options (ISO) range of IP 66 rated plugs and sockets are suitable for industrial, commercial and domestic single and three phase applications, from 10 A to 50 A; 3, 4 and 5 pin configurations.

The plugs feature extruded ribbed grips, making them easier to remove from the socket and also assists when tightening, to ensure a good seal.

The ISO switched socket incorporates an isolator that has the facility to padlock in the ON and OFF positions and accepts almost any locking device.

ISO Plugs and Sockets are made to AS/NZS 3112:2004 and AS/NZS 3123:2005 and their material composition makes them suitable for most industrial and commercial applications.



Designed, engineered and tested in Australia for Australian and New Zealand conditions, the design has been carefully crafted with rounded corners, ensuring there are no small crevices where dirt and grime can easily accumulate, making the ISO Plugs and Sockets great for applications where wash downs are required and cleanliness is essential.

The range consists of plugs, switched outlets, surface switches, socket outlets, back boxes and lids in a variety of current ratings and pin configurations to meet most applications.

The ISO Plugs and Sockets range is available now through authorised electrical wholesalers.


So make the switch to ISO Plugs and Sockets – NHP's Industrial Strength Option of connection and switching products.

For more information on the ISO range visit www.nhp.com.au/iso or contact your local NHP representative or electrical wholesaler.




NHP Industrial Strength Options

SOCKETS Features and Benefits

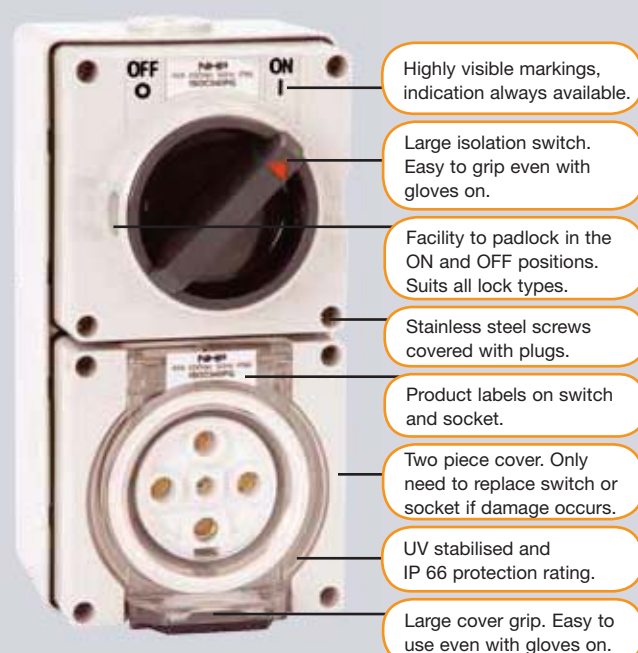

ISO Plugs

The ISO range of plugs are available as a straight plug and an angled plug (three phase versions only). The range of straight plugs is also available in resistant orange (RO) material.

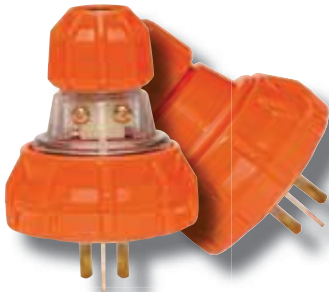

ISO Straight Plugs

Current and Voltage Rating	Pin Arrangement	Colour	Cat. No.	Price \$
10 A 250 V	3 Flat Pins	Electric Orange	ISOPS310P	31.70
		Resistant Orange	ISOPS310PRO	31.70
15 A 250 V	3 Flat Pins	Electric Orange	ISOPS315P	40.20
		Resistant Orange	ISOPS315PRO	40.20
20 A 250 V	3 Round Pins	Electric Orange	ISOPS320P	104.79
		Resistant Orange	ISOPS320PRO	104.79
32 A 250 V	3 Round Pins	Electric Orange	ISOPS332P	157.70
		Resistant Orange	ISOPS332PRO	157.70
10 A 500 V	4 Round Pins	Electric Orange	ISOPS410P	84.50
		Resistant Orange	ISOPS410PRO	84.50
20 A 500 V	4 Round Pins	Electric Orange	ISOPS420P	91.56
		Resistant Orange	ISOPS420PRO	91.56
32 A 500 V	4 Round Pins	Electric Orange	ISOPS432P	132.33
		Resistant Orange	ISOPS432PRO	132.33
40 A 500 V	4 Round Pins	Electric Orange	ISOPS440P	199.82
		Resistant Orange	ISOPS440PRO	199.82
50 A 500 V	4 Round Pins	Electric Orange	ISOPS450P	272.71
		Resistant Orange	ISOPS450PRO	272.71
10 A 500 V	5 Round Pins	Electric Orange	ISOPS510P	101.93
		Resistant Orange	ISOPS510PRO	101.93
20 A 500 V	5 Round Pins	Electric Orange	ISOPS520P	106.76
		Resistant Orange	ISOPS520PRO	106.76
32 A 500 V	5 Round Pins	Electric Orange	ISOPS532P	133.27
		Resistant Orange	ISOPS532PRO	133.27
40 A 500 V	5 Round Pins	Electric Orange	ISOPS540P	207.19
		Resistant Orange	ISOPS540PRO	207.19
50 A 500 V	5 Round Pins	Electric Orange	ISOPS550P	287.54
		Resistant Orange	ISOPS550PRO	287.54

ISO Angled Plugs

Current and Voltage Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
20 A 500 V	4 Round Pins	Electric Orange	ISOPA420P	95.45
32 A 500 V	4 Round Pins	Electric Orange	ISOPA432P	148.47
40 A 500 V	4 Round Pins	Electric Orange	ISOPA440P	199.46
50 A 500 V	4 Round Pins	Electric Orange	ISOPA450P	268.09
20 A 500 V	5 Round Pins	Electric Orange	ISOPA520P	106.86
32 A 500 V	5 Round Pins	Electric Orange	ISOPA532P	162.94
40 A 500 V	5 Round Pins	Electric Orange	ISOPA540P	206.93
50 A 500 V	5 Round Pins	Electric Orange	ISOPA550P	285.05

Available from Authorised Electrical Wholesalers

ISO Switched Socket Outlets

The ISO range of combination switched socket outlets are available in single phase and three phase versions. Covering a large current range from 10 A to 50 A, the range is available in grey (G), resistant orange (RO) and white (RW) material.

ISO Combination Switched Outlets

Current and Voltage Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	3 Flat Pins	Grey	ISOC310PG	92.03
		Grey (with deep base)	ISOC310PGDB	102.71
		Resistant Orange	ISOC310PRO	92.03
		Resistant White	ISOC310PRW	92.03
15 A 250 V	3 Flat Pins	Grey	ISOC315PG	103.54
		Grey (with deep base)	ISOC315PGDB	114.13
		Resistant Orange	ISOC315PRO	103.54
		Resistant White	ISOC315PRW	103.54
20 A 250 V	3 Round Pins	Grey	ISOC320PG	240.70
		Resistant Orange	ISOC320PRO	240.70
32 A 250 V	3 Round Pins	Grey	ISOC332PG	314.36
		Resistant Orange	ISOC332PRO	314.36
10 A 500 V	4 Round Pins	Grey	ISOC410PG	204.85
		Resistant Orange	ISOC410PRO	204.85
		Resistant White	ISOC410PRW	204.85
20 A 500 V	4 Round Pins	Grey	ISOC420PG	219.64
		Resistant Orange	ISOC420PRO	219.64
		Resistant White	ISOC420PRW	219.64
32 A 500 V	4 Round Pins	Grey	ISOC432PG	347.36
		Resistant Orange	ISOC432PRO	347.36
		Resistant White	ISOC432PRW	347.36
40 A 500 V	4 Round Pins	Grey	ISOC440PG	575.71
		Resistant Orange	ISOC440PRO	575.71
50 A 500 V	4 Round Pins	Grey	ISOC450PG	689.73
		Resistant Orange	ISOC450PRO	689.73
10 A 500 V	5 Round Pins	Grey	ISOC510PG	241.74
		Resistant Orange	ISOC510PRO	241.74
		Resistant White	ISOC510PRW	241.74
20 A 500 V	5 Round Pins	Grey	ISOC520PG	255.07
		Resistant Orange	ISOC520PRO	255.07
		Resistant White	ISOC520PRW	255.07
32 A 500 V	5 Round Pins	Grey	ISOC532PG	356.80
		Resistant Orange	ISOC532PRO	356.80
		Resistant White	ISOC532PRW	356.80
40 A 500 V	5 Round Pins	Grey	ISOC540PG	594.59
		Resistant Orange	ISOC540PRO	594.59
50 A 500 V	5 Round Pins	Grey	ISOC550PG	692.95
		Resistant Orange	ISOC550PRO	692.95



Deep base



Available from Authorised Electrical Wholesalers

ISO Switches

The ISO range of surface switches are available with or without a back box providing the user flexibility to mix and match units as required. All units have certified AC 23 and M ratings and comply with protection rating IP 66 when used in conjunction with a back box. The range of surface switches without the back box is available in grey (G), resistant orange (RO) and resistant white (RW) material.



Deep base



ISO Surface Switches

Current and Voltage Rating	No. of Switching Poles	AC 23 Rating	M Rating	Colour	Cat. No.	List Price \$
10 A 250 V	2	10 A	M80	Grey	ISOSW110PG	65.36
				Grey (with deep base)	ISOSW110PGDB	75.74
15 A 250 V	2	15 A	M80	Grey	ISOSW115PG	70.55
				Grey (with deep base)	ISOSW115PGDB	80.93
20 A 250 V	2	20 A	M150	Grey	ISOSW120PG	74.70
32 A 250 V	2	32 A	M180	Grey	ISOSW132PG	91.30
10 A 500 V	3	10 A	M100	Grey	ISOSW310PG	102.19
20 A 500 V	3	20 A	M100	Grey	ISOSW320PG	108.94
32 A 500 V	3	32 A	M100	Grey	ISOSW332PG	151.99
40 A 500 V	3	40 A	M100	Grey	ISOSW340PG	173.16
50 A 500 V	3	50 A	M200	Grey	ISOSW350PG	178.97

ISO Surface Switches (Less Back Box)

Current and Voltage Rating	No. of Switching Poles	AC 23 Rating	M Rating	Colour	Cat. No.	List Price \$
10 A 250 V	2	10 A	M80	Grey	ISOSW110PGLB	54.99
				Resistant Orange	ISOSW110PROLB	54.99
				Resistant White	ISOSW110PRWLB	54.99
15 A 250 V	2	15 A	M80	Grey	ISOSW115PGLB	60.18
				Resistant Orange	ISOSW115PROLB	60.18
				Resistant White	ISOSW115PRWLB	60.18
20 A 250 V	2	20 A	M150	Grey	ISOSW120PGLB	64.84
				Resistant Orange	ISOSW120PROLB	64.84
32 A 250 V	2	32 A	M180	Grey	ISOSW132PGLB	80.93
				Resistant Orange	ISOSW132PROLB	80.93
10 A 500 V	3	10 A	M100	Grey	ISOSW310PGLB	91.30
				Resistant Orange	ISOSW310PROLB	91.30
				Resistant White	ISOSW310PRWLB	91.30
20 A 500 V	3	20 A	M100	Grey	ISOSW320PGLB	97.53
				Resistant Orange	ISOSW320PROLB	97.53
				Resistant White	ISOSW320PRWLB	97.53
32 A 500 V	3	32 A	M100	Grey	ISOSW332PGLB	139.54
				Resistant Orange	ISOSW332PROLB	139.54
				Resistant White	ISOSW332PRWLB	139.54
40 A 500 V	3	40 A	M100	Grey	ISOSW340PGLB	160.71
				Resistant Orange	ISOSW340PROLB	160.71
50 A 500 V	3	50 A	M200	Grey	ISOSW350PGLB	166.52
				Resistant Orange	ISOSW350PROLB	166.52

Available from Authorised Electrical Wholesalers

ISO Socket Outlets

The ISO range of socket outlets are available with or without a back box providing the user with flexibility to mix and match units as required. Complies with protection rating IP 66 when used with a back box. The range of socket outlets without the back box is available in grey (G) resistant orange (RO) and resistant white (RW) material.



ISO Socket Outlets (Including Back Box)

Current and Voltage Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	3 Flat Pins	Grey	ISOSO310PG	91.30
15 A 250 V	3 Flat Pins	Grey	ISOSO315PG	97.53
20 A 250 V	3 Round Pins	Grey	ISOSO320PG	156.66
32 A 250 V	3 Round Pins	Grey	ISOSO332PG	209.58
10 A 250 V	4 Round Pins	Grey	ISOSO410PG	164.44
20 A 250 V	4 Round Pins	Grey	ISOSO420PG	177.41
32 A 250 V	4 Round Pins	Grey	ISOSO432PG	236.55
40 A 250 V	4 Round Pins	Grey	ISOSO440PG	342.38
50 A 250 V	4 Round Pins	Grey	ISOSO450PG	425.38
10 A 250 V	5 Round Pins	Grey	ISOSO510PG	169.63
20 A 250 V	5 Round Pins	Grey	ISOSO520PG	187.79
32 A 250 V	5 Round Pins	Grey	ISOSO532PG	246.93
40 A 250 V	5 Round Pins	Grey	ISOSO540PG	349.64
50 A 250 V	5 Round Pins	Grey	ISOSO550PG	433.68

Available from Authorised Electrical Wholesalers

ISO Socket Outlets



ISO Socket Outlets (Less Back Box)				
Current and Voltage Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	3 Flat Pins	Grey	ISOSO310PGLB	80.93
		Resistant Orange	ISOSO310PROLB	80.93
		Resistant White	ISOSO310PRWLB	80.93
15 A 250 V	3 Flat Pins	Grey	ISOSO315PGLB	87.15
		Resistant Orange	ISOSO315PROLB	87.15
		Resistant White	ISOSO315PRWLB	87.15
20 A 250 V	3 Round Pins	Grey	ISOSO320PGLB	147.33
		Resistant Orange	ISOSO320PROLB	147.33
32 A 250 V	3 Round Pins	Grey	ISOSO332PLB	199.20
		Resistant Orange	ISOSO332PROLB	199.20
10 A 250 V	4 Round Pins	Grey	ISOSO410PGLB	152.51
		Resistant Orange	ISOSO410PROLB	152.51
		Resistant White	ISOSO410PRWLB	152.51
20 A 250 V	4 Round Pins	Grey	ISOSO420PGLB	166.00
		Resistant Orange	ISOSO420PROLB	166.00
		Resistant White	ISOSO420PRWLB	166.00
32 A 250 V	4 Round Pins	Grey	ISOSO432PGLB	224.10
		Resistant Orange	ISOSO432PROLB	224.10
		Resistant White	ISOSO432PRWLB	224.10
40 A 250 V	4 Round Pins	Grey	ISOSO440PGLB	329.93
		Resistant Orange	ISOSO440PROLB	329.93
50 A 250 V	4 Round Pins	Grey	ISOSO450PGLB	412.93
		Resistant Orange	ISOSO450PROLB	412.93
10 A 250 V	5 Round Pins	Grey	ISOSO510PGLB	158.74
		Resistant Orange	ISOSO510PROLB	158.74
		Resistant White	ISOSO510PRWLB	158.74
20 A 250 V	5 Round Pins	Grey	ISOSO520PGLB	175.34
		Resistant Orange	ISOSO520PROLB	175.34
		Resistant White	ISOSO520PRWLB	175.34
32 A 250 V	5 Round Pins	Grey	ISOSO532PGLB	234.48
		Resistant Orange	ISOSO532PROLB	234.48
		Resistant White	ISOSO532PRWLB	234.48
40 A 250 V	5 Round Pins	Grey	ISOSO540PGLB	337.19
		Resistant Orange	ISOSO540PROLB	337.19
50 A 250 V	5 Round Pins	Grey	ISOSO550PGLB	421.23
		Resistant Orange	ISOSO550PROLB	421.23

Available from Authorised Electrical Wholesalers

ISO Switched MOD6 RCD Protected Combinations



The ISO range of RCD protected outlets are available as either a switched RCD protected combination or an RCD protected socket outlet. Available in grey (G) or resistant orange (RO) material, all units come supplied with a MOD6 safety switch and are pre-wired ready to install.

ISO Switched RCD Protected Combinations

Current and Voltage Rating	RCD Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	30 mA	3 Flat Pins	Grey	ISOC310RCDPG	298.80
			Resistant Orange	ISOC310RCDPRO ⁱ	298.80
15 A 250 V	30 mA	3 Flat Pins	Grey	ISOC315RCDPG	310.84
			Resistant Orange	ISOC315RCDPRO ⁱ	310.84
10 A 500 V	30 mA	4 Round Pins	Grey	ISOC410RCDPG	674.69
			Resistant Orange	ISOC410RCDPRO ⁱ	674.69
20 A 500 V	30 mA	4 Round Pins	Grey	ISOC420RCDPG	692.53
			Resistant Orange	ISOC420RCDPRO ⁱ	692.53
32 A 500 V	30 mA	4 Round Pins	Grey	ISOC432RCDPG	777.30
			Resistant Orange	ISOC432RCDPRO ⁱ	777.30
40 A 500 V	30 mA	4 Round Pins	Grey	ISOC440RCDPG	884.78
			Resistant Orange	ISOC440RCDPRO ⁱ	884.78
10 A 500 V	30 mA	5 Round Pins	Grey	ISOC510RCDPG	700.21
			Resistant Orange	ISOC510RCDPRO ⁱ	700.21
20 A 500 V	30 mA	5 Round Pins	Grey	ISOC520RCDPG	715.46
			Resistant Orange	ISOC520RCDPRO ⁱ	715.46
32 A 500 V	30 mA	5 Round Pins	Grey	ISOC532RCDPG	821.60
			Resistant Orange	ISOC532RCDPRO ⁱ	821.60
40 A 500 V	30 mA	5 Round Pins	Grey	ISOC540RCDPG	954.29
			Resistant Orange	ISOC540RCDPRO ⁱ	954.29
50 A 500 V	30 mA	5 Round Pins	Grey	ISOC550RCDPG	1072.78
			Resistant Orange	ISOC550RCDPRO ⁱ	1072.78

Note:

- ⁱ Assembled to customer order
Supplied fully assembled and wired complete with NHP safety switch (MOD6 Series)

Available from Authorised Electrical Wholesalers

ISO Switched Din-Safe RCD Protected Combinations



The ISO range of RCD protected outlets are available as either a switched RCD protected combination or an RCD protected socket outlet. Available in grey (G) or resistant orange (RO) material, all units come supplied with an NHP Din-Safe RCCB safety switch and are pre-wired, ready to install.

ISO Switched Din-Safe RCD Protected Combinations					
Current and Voltage Rating	RCD Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	30 mA	3 Flat Pins	Grey	ISOC310RCDTEPG ⁱ	371.43
			Resistant Orange	ISOC310RCDTERO ⁱ	371.43
15 A 250 V	30 mA	3 Flat Pins	Grey	ISOC315RCDTEPG ⁱ	383.46
			Resistant Orange	ISOC315RCDTERO ⁱ	383.46
10 A 500 V	30 mA	4 Round Pins	Grey	ISOC410RCDTEPG ⁱ	757.69
			Resistant Orange	ISOC410RCDTERO ⁱ	757.69
20 A 500 V	30 mA	4 Round Pins	Grey	ISOC420RCDTEPG ⁱ	775.53
			Resistant Orange	ISOC420RCDTERO ⁱ	775.53
32 A 500 V	30 mA	4 Round Pins	Grey	ISOC432RCDTEPG ⁱ	860.30
			Resistant Orange	ISOC432RCDTERO ⁱ	860.30
40 A 500 V	30 mA	4 Round Pins	Grey	ISOC440RCDTEPG ⁱ	967.78
			Resistant Orange	ISOC440RCDTERO ⁱ	967.78
10 A 500 V	30 mA	5 Round Pins	Grey	ISOC510RCDTEPG ⁱ	783.21
			Resistant Orange	ISOC510RCDTERO ⁱ	783.21
20 A 500 V	30 mA	5 Round Pins	Grey	ISOC520RCDTEPG ⁱ	798.46
			Resistant Orange	ISOC520RCDTERO ⁱ	798.46
32 A 500 V	30 mA	5 Round Pins	Grey	ISOC532RCDTEPG ⁱ	904.60
			Resistant Orange	ISOC532RCDTERO ⁱ	904.60
40 A 500 V	30 mA	5 Round Pins	Grey	ISOC540RCDTEPG ⁱ	1037.29
			Resistant Orange	ISOC540RCDTERO ⁱ	1037.29
50 A 500 V	30 mA	5 Round Pins	Grey	ISOC550RCDTEPG ⁱ	1150.00
			Resistant Orange	ISOC550RCDTERO ⁱ	1150.00

Note:

- ⁱ Assembled to customer order
Supplied fully assembled and wired complete with NHP safety switch (NHP Din-Safe RCCB)

Available from Authorised Electrical Wholesalers

ISO MOD6 RCD Protected Outlets

The ISO range of RCD protected outlets are available as either a switched RCD protected combination (page 11) or a RCD protected socket outlet. Available in grey (G) or resistant orange (RO) material, all units come supplied with a MOD6 safety switch and are pre-wired ready to install.



ISO MOD6 RCD Protected Outlets

Current and Voltage Rating	RCD Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	30 mA	3 Flat Pins	Grey	ISOSO310RCDPG	250.04
			Resistant Orange	ISOSO310RCDPRO ⁱ	250.04
15 A 250 V	30 mA	3 Flat Pins	Grey	ISOSO315RCDPG	261.45
			Resistant Orange	ISOSO315RCDPRO ⁱ	261.45
10 A 500 V	30 mA	4 Round Pins	Grey	ISOSO410RCDPG	547.39
			Resistant Orange	ISOSO410RCDPRO ⁱ	547.39
20 A 500 V	30 mA	4 Round Pins	Grey	ISOSO420RCDPG	565.33
			Resistant Orange	ISOSO420RCDPRO ⁱ	565.33
32 A 500 V	30 mA	4 Round Pins	Grey	ISOSO432RCDPG	620.84
			Resistant Orange	ISOSO432RCDPRO ⁱ	620.84
40 A 500 V	30 mA	4 Round Pins	Grey	ISOSO440RCDPG	703.84
			Resistant Orange	ISOSO440RCDPRO ⁱ	703.84
10 A 500 V	30 mA	5 Round Pins	Grey	ISOSO510RCDPG	572.91
			Resistant Orange	ISOSO510RCDPRO ⁱ	572.91
20 A 500 V	30 mA	5 Round Pins	Grey	ISOSO520RCDPG	600.71
			Resistant Orange	ISOSO520RCDPRO ⁱ	600.71
32 A 500 V	30 mA	5 Round Pins	Grey	ISOSO532RCDPG	644.18
			Resistant Orange	ISOSO532RCDPRO ⁱ	644.18
40 A 500 V	30 mA	5 Round Pins	Grey	ISOSO540RCDPG	762.36
			Resistant Orange	ISOSO540RCDPRO ⁱ	762.36
50 A 500 V	30 mA	5 Round Pins	Grey	ISOSO550RCDPG ⁱ	850.50
			Resistant Orange	ISOSO550RCDPRO ⁱ	850.50

Note:

- ⁱ Assembled to customer order
Supplied fully assembled and wired complete with an NHP safety switch (MOD6 Series)

Available from Authorised Electrical Wholesalers

ISO Din-Safe RCD Protected Outlets

The ISO range of RCD protected outlets are available as either a switched RCD protected combination or a RCD protected socket outlet. Available in grey (G) or resistant orange (RO) material, all units come supplied with a Din-Safe RCCB safety switch and are pre-wired, ready to install.



ISO Din-Safe RCD Protected Outlets

Current and Voltage Rating	RCD Rating	Pin Arrangement	Colour	Cat. No.	List Price \$
10 A 250 V	30 mA	3 Flat Pins	Grey	ISOSO310RCDTEPG ⁱ	322.66
			Resistant Orange	ISOSO310RCDTERO ⁱ	322.66
15 A 250 V	30 mA	3 Flat Pins	Grey	ISOSO315RCDTEPG ⁱ	334.08
			Resistant Orange	ISOSO315RCDTERO ⁱ	334.08
10 A 500 V	30 mA	4 Round Pins	Grey	ISOSO410RCDTEPG ⁱ	630.39
			Resistant Orange	ISOSO410RCDTERO ⁱ	630.39
20 A 500 V	30 mA	4 Round Pins	Grey	ISOSO420RCDTEPG ⁱ	648.33
			Resistant Orange	ISOSO420RCDTERO ⁱ	648.33
32 A 500 V	30 mA	4 Round Pins	Grey	ISOSO432RCDTEPG ⁱ	703.84
			Resistant Orange	ISOSO432RCDTERO ⁱ	703.84
40 A 500 V	30 mA	4 Round Pins	Grey	ISOSO440RCDTEPG ⁱ	786.84
			Resistant Orange	ISOSO440RCDTERO ⁱ	786.84
10 A 500 V	30 mA	5 Round Pins	Grey	ISOSO510RCDTEPG ⁱ	655.91
			Resistant Orange	ISOSO510RCDTERO ⁱ	655.91
20 A 500 V	30 mA	5 Round Pins	Grey	ISOSO520RCDTEPG ⁱ	683.71
			Resistant Orange	ISOSO520RCDTERO ⁱ	683.71
32 A 500 V	30 mA	5 Round Pins	Grey	ISOSO532RCDTEPG ⁱ	727.18
			Resistant Orange	ISOSO532RCDTERO ⁱ	727.18
40 A 500 V	30 mA	5 Round Pins	Grey	ISOSO540RCDTEPG ⁱ	845.36
			Resistant Orange	ISOSO540RCDTERO ⁱ	845.36
50 A 500 V	30 mA	5 Round Pins	Grey	ISOSO550RCDTEPG ⁱ	950.50
			Resistant Orange	ISOSO550RCDTERO ⁱ	950.50

Note:

- ⁱ Assembled to customer order
Supplied fully assembled and wired complete with an NHP safety switch (NHP Din-Safe RCCB)

Available from Authorised Electrical Wholesalers

ISO RCD Covers & Accessories

The ISO MCB/RCD cover is suitable for any 2, 3 or 4 gang back box in the ISO range. Available in grey (G) or resistant orange (RO) material, the 2 gang cover will accept any 4 pole width device and is supplied with mounting rail and mounting kit.

ISO RCD Covers (For Back Boxes)

No. of Gangs	Dimensions	Colour	Cat. No.	List Price \$
2	198 x 101 x 45 mm	Grey	ISORCDNPG	57.06
		Resistant Orange	ISORCDNPRO	57.06

ISO Back Boxes

No. of Gangs	Depth	Dimensions	Colour	Cat. No.	List Price \$
1	Standard	101 x 101 x 63 mm	Grey	ISOBB1G	25.42
			Resistant Orange	ISOBB1RO	25.42
			Resistant White	ISOBB1RW	25.42
1	Shallow	101 x 101 x 38 mm	Grey	ISOBBS1G	22.31
2	Standard	198 x 101 x 63 mm	Grey	ISOBB2G	51.36
			Resistant Orange	ISOBB2RO	51.36
			Resistant White	ISOBB2RW	51.36
2	Shallow	198 x 101 x 38 mm	Grey	ISOBBS2G	44.61
3	Standard	294 x 101 x 63 mm	Grey	ISOBB3G	76.26
			Resistant Orange	ISOBB3RO	76.26
4	Standard	198 x 198 x 63 mm	Grey	ISOBB4G	101.68
			Resistant Orange	ISOBB4RO	101.68

ISO Brass Earthing Plates (To Suit SWA Glands)

Suits Gangs	Depth	Suits Gland type	Material	Cat. No.	List Price \$
1, 2 & 3	Standard	2 x M25x1.5 mm	Brass	ISOSWAGLAND	41.50
1 & 2	Shallow	2 x M20x1.5 mm	Brass	ISOSWAGLANDSH	36.31

ISO Lids (For Back Boxes)

No. of Gangs	Dimensions	Colour	Cat. No.	List Price \$
1	101 x 101 x 38 mm	Grey	ISOBBL1G	14.11
		Resistant Orange	ISOBBL1RO	14.11
		Resistant White	ISOBBL1RW	14.11
2	198 x 101 x 38 mm	Grey	ISOBBL2G	28.01
		Resistant Orange	ISOBBL2RO	28.01

Available from Authorised Electrical Wholesalers

ISO Technical Data

Combination Switched Socket Outlets

Cat. No.	Switching Poles	AC 23 Rating	M Rating	Rated Current	Number of Pins	Conductor Size in mm ²		IP Rating	Matching Plug Straight	Matching Plug Angle
ISOC310xx	2	10 A	M80	10 A	3 Flat	1.5	6	IP 66	ISOPS310P	-
ISOC315xx	2	15 A	M80	15 A	3 Flat	1.5	6	IP 66	ISOPS315P	-
ISOC320xx	2	20 A	M150	20 A	3 Round	2.5	6	IP 66	ISOPS320P	-
ISOC332XX	2	32 A	M180	32 A	3 Round	4	16	IP 66	ISOPS332P	-
ISOC410xx	3	10 A	M100	10 A	4 Round	1.5	6	IP 66	ISOPS410P	-
ISOC420xx	3	20 A	M100	20 A	4 Round	2.5	6	IP 66	ISOPS420P	ISOPA420P
ISOC432xx	3	32 A	M100	32 A	4 Round	4	16	IP 66	ISOPS432P	ISOPA432P
ISOC440xx	3	40 A	M100	40 A	4 Round	10	16	IP 66	ISOPS440P	ISOPA440P
ISOC450xx	3	50 A	M200	50 A	4 Round	10	16	IP 66	ISOPS450P	ISOPA450P
ISOC510xx	3	10 A	M100	10 A	5 Round	1.5	6	IP 66	ISOPS510P	-
ISOC520xx	3	20 A	M100	20 A	5 Round	2.5	6	IP 66	ISOPS520P	ISOPA520P
ISOC532xx	3	32 A	M100	32 A	5 Round	4	16	IP 66	ISOPS532P	ISOPA532P
ISOC540xx	3	40 A	M100	40 A	5 Round	10	16	IP 66	ISOPS540P	ISOPA540P
ISOC550xx	3	50 A	M200	50 A	5 Round	10	16	IP 66	ISOPS550P	ISOPA550P

Substitute xx with colour; grey (G), resistant orange (RO) or resistant white (RW).

Surface Socket Outlets

Cat. No.	Rated Current	Number of Pins	Conductor Size in mm ²		IP Rated	Matching Plug Straight	Matching Plug Angle
ISOSO310xx	10 A	3 Flat	1.5	6	IP 66	ISOPS310P	-
ISOSO315xx	15 A	3 Flat	1.5	6	IP 66	ISOPS315P	-
ISOSO320xx	20 A	3 Round	2.5	6	IP 66	ISOPS320P	-
ISOSO332xx	32 A	3 Round	4	16	IP 66	ISOPS332P	-
ISOSO410xx	10 A	4 Round	1.5	6	IP 66	ISOPS410P	-
ISOSO420xx	20 A	4 Round	2.5	6	IP 66	ISOPS420P	ISOPA420P
ISOSO432xx	32 A	4 Round	4	16	IP 66	ISOPS432P	ISOPA432P
ISOSO440xx	40 A	4 Round	10	16	IP 66	ISOPS440P	ISOPA440P
ISOSO450xx	50 A	4 Round	10	16	IP 66	ISOPS450P	ISOPA450P
ISOSO510xx	10 A	5 Round	1.5	6	IP 66	ISOPS510P	-
ISOSO520xx	20 A	5 Round	2.5	6	IP 66	ISOPS520P	ISOPA520P
ISOSO532xx	32 A	5 Round	4	16	IP 66	ISOPS532P	ISOPA532P
ISOSO540xx	40 A	5 Round	10	16	IP 66	ISOPS540P	ISOPA540P
ISOSO550xx	50 A	5 Round	10	16	IP 66	ISOPS550P	ISOPA550P

Substitute xx with colour; grey (G), resistant orange (RO) or resistant white (RW).

Surface Switches

Cat. No.	Switching Poles	AC 23 Rating	M Rating	Rated Current	Conductor Size in mm ²		IP Rating
ISOSW110xx	2	10 A	M80	10 A	1.5	6	IP 66
ISOSW115xx	2	15 A	M80	15 A	1.5	6	IP 66
ISOSW120xx	2	20 A	M150	20 A	2.5	6	IP 66
ISOSW132xx	2	32 A	M180	32 A	4	16	IP 66
ISOSW310xx	3	10 A	M100	10 A	1.5	6	IP 66
ISOSW320xx	3	20 A	M100	20 A	2.5	6	IP 66
ISOSW332xx	3	32 A	M100	32 A	4	16	IP 66
ISOSW340xx	3	40 A	M100	40 A	10	16	IP 66
ISOSW350xx	3	50 A	M200	50 A	10	16	IP 66

Substitute xx with colour; grey (G), resistant orange (RO) or resistant white (RW).

Available from Authorised Electrical Wholesalers

Switched RCD Protected Combinations

Cat. No.	Rated Current	Number of Pins	RCD Rating	IP Rating	Matching Plug Straight	Matching Plug Angle
ISOC310RCDxxx	10 A	3 Flat	30 mA	IP 66	ISOPS310P	-
ISOC315RCDxxx	15 A	3 Flat	30 mA	IP 66	ISOPS315P	-
ISOC320RCDxxx	20 A	3 Round	30 mA	IP 66	ISOPS320P	-
ISOC332RCDxxx	32 A	3 Round	30 mA	IP 66	ISOPS332P	-
ISOC410RCDxxx	10 A	4 Round	30 mA	IP 66	ISOPS410P	-
ISOC420RCDxxx	20 A	4 Round	30 mA	IP 66	ISOPS420P	ISOPA420P
ISOC432RCDxxx	32 A	4 Round	30 mA	IP 66	ISOPS432P	ISOPA432P
ISOC440RCDxxx	40 A	4 Round	30 mA	IP 66	ISOPS440P	ISOPA440P
ISOC510RCDxxx	10 A	5 Round	30 mA	IP 66	ISOPS510P	-
ISOC520RCDxxx	20 A	5 Round	30 mA	IP 66	ISOPS520P	ISOPA520P
ISOC532RCDxxx	32 A	5 Round	30 mA	IP 66	ISOPS532P	ISOPA532P
ISOC540RCDxxx	40 A	5 Round	30 mA	IP 66	ISOPS540P	ISOPA540P

Substitute xxx with colour and safety switch type; grey MOD6 (PG), resistant orange MOD6 (PRO), grey NHP Din-Safe (TEPG) or resistant orange NHP Din-Safe (TERO).

RCD Protected Combinations

Cat. No.	Rated Current	Number of Pins	RCD Rating	IP Rating	Matching Plug Straight	Matching Plug Angle
ISOSO310RCDxxx	10 A	3 Flat	30 mA	IP 66	ISOPS310P	-
ISOSO315RCDxxx	15 A	3 Flat	30 mA	IP 66	ISOPS315P	-
ISOSO320RCDxxx	20 A	3 Round	30 mA	IP 66	ISOPS320P	-
ISOSO332RCDxxx	32 A	3 Round	30 mA	IP 66	ISOPS332P	-
ISOSO410RCDxxx	10 A	4 Round	30 mA	IP 66	ISOPS410P	-
ISOSO420RCDxxx	20 A	4 Round	30 mA	IP 66	ISOPS420P	ISOPA420P
ISOSO432RCDxxx	32 A	4 Round	30 mA	IP 66	ISOPS432P	ISOPA432P
ISOSO440RCDxxx	40 A	4 Round	30 mA	IP 66	ISOPS440P	ISOPA440P
ISOSO510RCDxxx	10 A	5 Round	30 mA	IP 66	ISOPS510P	-
ISOSO520RCDxxx	20 A	5 Round	30 mA	IP 66	ISOPS520P	ISOPA520P
ISOSO532RCDxxx	32 A	5 Round	30 mA	IP 66	ISOPS532P	ISOPA532P
ISOSO540RCDxxx	40 A	5 Round	30 mA	IP 66	ISOPS540P	ISOPA540P

Substitute xxx with colour and safety switch type; grey MOD6 (PG), resistant orange MOD6 (PRO), grey NHP Din-Safe (TEPG) or resistant orange NHP Din-Safe (TERO).

Available from Authorised Electrical Wholesalers

Deconnector™ Industrial Plugs and Sockets

Introduction

Proconnect is a world leader in the manufacture of industrial plugs and sockets for the mining, food processing, commercial, rail and marine industries.

The 3PS isolating plugs from Proconnect are available in five sizes: 16 A, 32 A, 63 A, 125 A and 160 A.

The benefits of the isolating plugs are that it eliminates the need for a switch and ensures that power is available where and when it is required with complete safety to the operator. The socket outlet and appliance inlet are interlocked and then switched when engaged, making the connection and disconnection under load, safe and reliable.

The connector also discriminates so connection of the same voltage, amperage and number of poles can only be mated, making the 3PS isolating plugs the complete answer for industrial safety, without the need for specialised personnel when operating portable tools and equipment.

3PS Series assemblies

Main items



Socket outlet



Appliance inlet

Accessories



Angled wall box



Handle

Assemblies



Angled wall box
& socket outlet



Handle & socket outlet



Angled wall box
& appliance inlet



Handle & appliance inlet

16 A Plugs and Sockets (3PS Series)

Maximum cable sizes:	10 mm ² standard 6 mm ² flexible		
Cable outside diameter:	minimum 7 mm maximum 18 mm	Rated current:	AC23 16 A/440 V AC (AS/NZ 3947-3 IEC60947-3) 30 A maximum rated current (IEC60309-1) M-Rating M200 (AS3133)
Stripping length:	sheathing 33 mm insulation 13 mm		
IP rating:	socket outlet IP 66 outlet and inlet IP 66	Housing material:	polyamide 6




Contacts	Voltage rating	Socket outlet Cat. No.	List Price \$	Appliance inlet Cat. No.	List Price \$
1P+N+E	220-240 V AC	3PS1D1NE01	233.44	3PS1A1NE01	113.09
3P+E	380-440 V AC	3PS1D30E01	249.00	3PS1A30E01	127.61
3P+N+E	380-440 V AC	3PS1D3NE01	295.69	3PS1A3NE01	144.21
1P+N+E+2p	220-240 V AC	3PS16D1NE01P ¹⁾	347.56	3PS16A1NE01P ¹⁾	149.40
3P+E+2p	380-440 V AC	3PS16D30E01P ¹⁾	373.50	3PS16A30E01P ¹⁾	162.89
3P+N+E+2p	380-440 V AC	3PS16D3NE01P ¹⁾	404.63	3PS16A3NE01P ¹⁾	177.41

Accessories		
Description	Cat. No.	List Price \$
 Angled wall box 30° M20X1.5 (without cable gland)	3PS1WAS	56.03
 Handle – maximum outside cable diameter 18 mm	3PS1G	39.94
 Handle with 32 mm thread with cable gland	3PS1GFP	42.54
 30° incline sleeve	3PS1LB	35.28
 Appliance inlet plug cap	3PS1PC	49.80

Note: ¹⁾ Includes 2 x 16 A pilot pins.

32 A Plugs and Sockets (3PS Series)

Maximum cable sizes:	16 mm ² standard 10 mm ² flexible		
Cable outside diameter:	minimum 8 mm maximum 22 mm	Rated current:	AC23 32 A/440 V AC (AS/NZ 3947-3 / IEC60947-3) 50 A maximum rated current (IEC60309-1) M-Rating M250 (AS3133)
Stripping length:	sheathing 37 mm insulation 17 mm		
IP rating:	socket outlet IP 66 outlet and inlet IP 66	Housing material:	polyamide 6

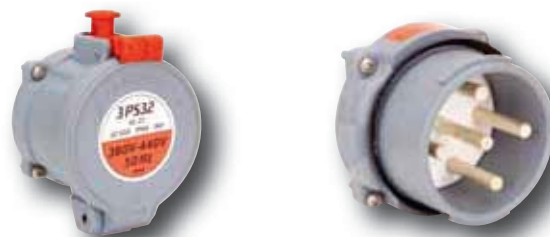

Contacts	Voltage rating	Socket outlet Cat. No.	List Price \$	Appliance inlet Cat. No.	List Price \$
1P+N+E	220-240 V AC	3PS3D1NE01	347.56	3PS3A1NE01	169.11
3P+E	380-440 V AC	3PS3D30E01	373.50	3PS3A30E01	198.16
3P+N+E	380-440 V AC	3PS3D3NE01	404.63	3PS3A3NE01	223.06

1P+N+E+2p	220-240 V AC	3PS32D1NE01P ¹⁾	332.00	3PS32A1NE01P ¹⁾	399.44
3P+E+2p	380-440 V AC	3PS32D30E01P ¹⁾	357.94	3PS32A30E01P ¹⁾	461.69
3P+N+E+2p	380-440 V AC	3PS32D3NE01P ¹⁾	404.63	3PS32A3NE01P ¹⁾	492.81

Accessories		
Description	Cat. No.	List Price \$
Angled wall box 30° M25X1.5 (without cable gland)	3PS3WAS	56.03
Handle – maximum outside cable diameter 22 mm	3PS3G	39.94
Handle with 40 mm thread with cable gland	3PS3GFP	42.54
30° incline sleeve	3PS3LB	35.28
Appliance inlet plug cap	3PS3PC	49.80



Note: ¹⁾ Includes 2 x 16 A pilot pins.

63 A Plugs and Sockets (3PS Series)

Maximum cable sizes:	50 mm ² standard 35 mm ² flexible		
Cable outside diameter:	minimum 11 mm maximum 29 mm	Rated current:	AC23 63 A/440 V AC (AS/NZ 3947-3 / IEC60947-3) 90 A maximum rated current (IEC60309-1) M-Rating M250 (AS3133)
Stripping length:	sheathing 60 mm insulation 30 mm		
IP rating:	socket outlet IP 66 outlet and inlet IP 66	Housing material:	polyamide 6



Contacts	Voltage rating	Socket outlet Cat. No.	List Price \$	Appliance inlet Cat. No.	List Price \$
1P+N+E	220-240 V AC	3PS6D1NE01	451.31	3PS6A1NE01	274.94
3P+E	380-440 V AC	3PS6D30E01	487.63	3PS6A30E01	316.44
3P+N+E	380-440 V AC	3PS6D3NE01	539.50	3PS6A3NE01	352.75

1P+N+E+2p	220-240 V AC	3PS63D1NE01P ¹⁾	560.25	3PS63A1NE01P ¹⁾	207.50
3P+E+2p	380-440 V AC	3PS63D30E01P ¹⁾	684.75	3PS63A30E01P ¹⁾	238.63
3P+N+E+2p	380-440 V AC	3PS63D3NE01P ¹⁾	747.00	3PS63A3NE01P ¹⁾	274.94

Accessories		
Description	Cat. No.	List Price \$
Angled wall box 30° M40X1.5 (without cable gland)	3PS6WAS	71.59
Handle – maximum outside cable diameter 29 mm	3PS6G	69.51
Handle with 50 mm thread with cable gland	3PS6GFP	75.22
30° incline sleeve	3PS6LB	65.88
Appliance inlet plug cap	3PS6PC	86.63



Note: ¹⁾ Includes 2 x 16 A pilot pins.

100 A Plugs and Sockets (3PS Series)

Maximum cable sizes:	70 mm ² standard 50 mm ² flexible		
Cable outside diameter:	minimum 22 mm maximum 45 mm	Rated current:	AC23 100 A/440 V AC (AS/NZ 3947-3 / IEC60947-3) 150 A maximum rated current (IEC60309-1) M-Rating M500 (AS3133)
Stripping length:	sheathing 90 mm insulation 37 mm		
IP rating:	socket outlet IP 66 outlet and inlet IP 66	Housing material:	polyamide 6



Contacts	Voltage rating	Socket outlet Cat. No.	List Price \$	Appliance inlet Cat. No.	List Price \$
1P+N+E	220-240 V AC	3PS9D1NE01	923.38	3PS9A1NE01	622.50
3P+E	380-440 V AC	3PS9D30E01	1058.25	3PS9A30E01	726.25
3P+N+E	380-440 V AC	3PS9D3NE01	1151.63	3PS9A3NE01	840.38

1P+N+E+2p	220-240 V AC	3PS9D1NE01P ¹⁾	1245.00	3PS9A1NE01P ¹⁾	913.00
3P+E+2p	380-440 V AC	3PS9D30E01P ¹⁾	1286.50	3PS9A30E01P ¹⁾	1058.25
3P+N+E+2p	380-440 V AC	3PS9D3NE01P ¹⁾	1369.50	3PS9A3NE01P ¹⁾	1068.63

Accessories

Description	Cat. No.	List Price \$
Angled wall box 60° M50X1.5 (without cable gland)	3PS9WAS	570.63
Handle – maximum outside cable diameter 45 mm	3PS9G	233.44
60° incline sleeve	3PS9LB	207.50
Appliance inlet plug cap	3PS9PC	212.69
Spare locking levers	3PSBFR	155.63



Note: ¹⁾ Includes 2 x 16 A pilot pins
 Available on indent only.

160 A Plugs and Sockets (3PS Series)

Maximum cable sizes:	120 mm ² standard 70 mm ² flexible	Rated current:	AC23 160 A/440 V AC (AS/NZ 3947-3 / IEC60947-3)
Cable outside diameter:	minimum 17 mm maximum 60 mm		250 A maximum rated current (IEC60309-1)
Stripping length:	sheathing 155 mm insulation 38 mm		M-Rating M670 (AS3133)
IP rating:	socket outlet IP 66 outlet and inlet IP 66	Housing material:	cast aluminium



Contacts	Voltage rating	Socket outlet Cat. No.	List Price \$	Appliance inlet Cat. No.	List Price \$
1P+N+E	220-240 V AC	 3PS2D1NE01	1587.38	 3PS2A1NE01	902.63
3P+E	380-440 V AC	3PS2D30E01	1815.63	3PS2A30E01	1068.63
3P+N+E	380-440 V AC	3PS2D3NE01	1909.00	3PS2A3NE01	1203.50

1P+N+E+2p	220-240 V AC	 3PS2D1NE01P ¹⁾	2116.50	 3PS2A1NE01P ¹⁾	2116.50
3P+E+2p	380-440 V AC	3PS2D30E01P ¹⁾	1826.00	3PS2A30E01P ¹⁾	1826.00
3P+N+E+2p	380-440 V AC	3PS2D3NE01P ¹⁾	2313.63	3PS2A3NE01P ¹⁾	2313.63

Accessories		
Description	Cat. No.	List Price \$
Angled wall box 60° M63X1.5 (without cable gland)	3PS2WAS	778.13
Handle – maximum outside cable diameter 60 mm	3PS2G	264.56
60° incline sleeve	3PS2LB	212.69
Appliance inlet plug cap	3PS2PC	233.44
Spare locking levers	3PSBFR	155.63





Note: ¹⁾ Includes 2 x 16 A pilot pins
 Available on indent only.

Dimensions (mm)



Angled Wall Box with Appliance Inlet

Series	A	B	C	d	E	E'	F	Kg	Draw. No	ISO
3PS16	114	108	82	6	69	69	82	0.22	1	M20x1.5
3PS32	134	128	91	7	78	88	101	0.36	1	M25x1.5
3PS63	169	156	106	8	88	111	129	0.64	1	M40x1.5
3PS125	223	204	155	9	139	154	170	-	2	M50x1.5
3PS200	266	216	155	9	139	154	170	-	2	M63x1.5

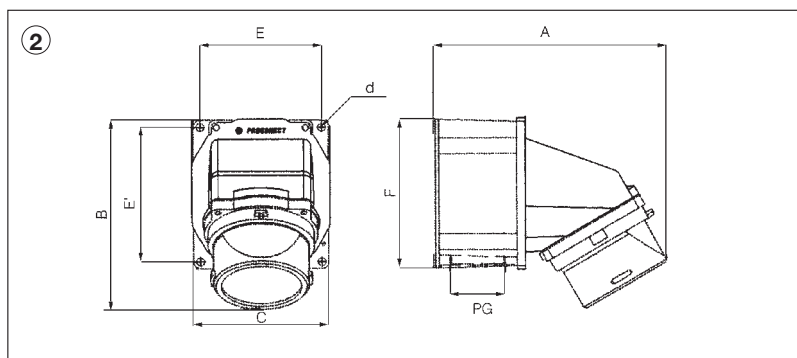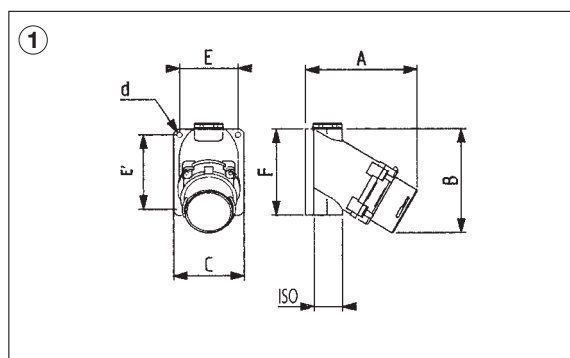

Angled Wall Box with Socket Outlet


Series	A	B	C	d	E	E'	F	Y	Kg	Draw. No	ISO
3PS16	141	126	82	6	69	69	82	196	0.31	3	M20x1.5
3PS32	162	148	91	7	78	88	101	226	0.50	3	M25x1.5
3PS63	202	180	106	8	88	111	129	273	0.88	3	M40x1.5
3PS125	285	242	155	9	139	154	170	354	-	4	M50x1.5
3PS200	308	248	155	9	139	154	170	375	-	4	M63x1.5

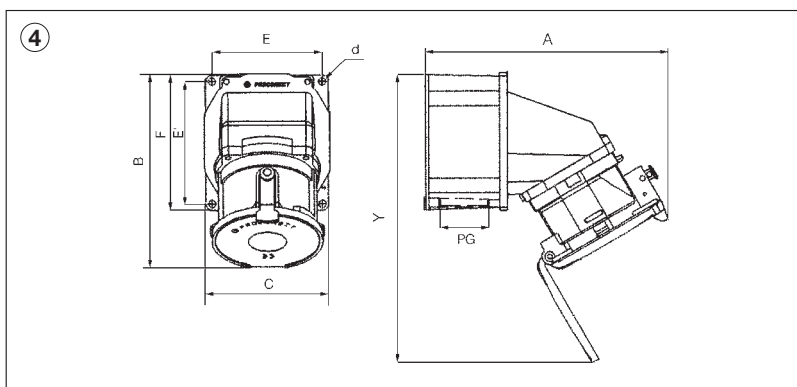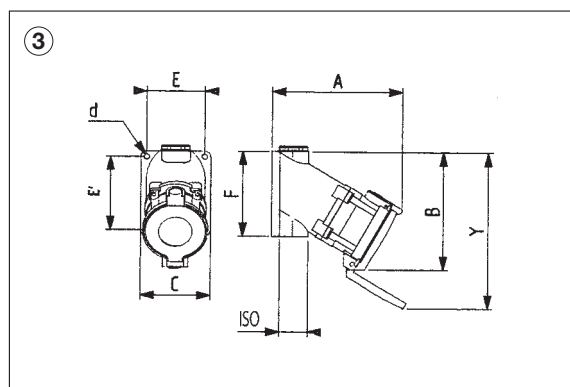

Dimensions (mm)


Socket Outlet

Series	A	B	C	D	d	E	G	H	Y	Z	Kg
3PS16	71	92	72	57	4.5	48	47	13	107	120	0.24
3PS32	77	106	82	67	4.5	55	51	17	116	135	0.38
3PS63	89	122	99	80	5.5	66	59	25	132	163	0.64
3PS125	120	140	129	100	6	81	68	24	152	218	1.50
3PS200	122	179	144	120	7	98	94	35	190	230	2.40




Socket Outlet with Handle

Series	A	B	C	Diam.	Kg
3PS16	151	97	72	18	0.30
3PS32	172	107	82	22	0.47
3PS63	201	123	99	29	0.79
3PS125	261	145	129	45	1.90
3PS200	353	177	144	58	3.15



Appliance Inlet with Handle

Series	A	B	C	Diam.	Kg
3PS16	100	71	30.5	18	0.22
3PS32	115	82	34	22	0.33
3PS63	133	96	40	29	0.56
3PS125	167	125	48	45	1.20
3PS200	260	143	54	58	2.60



Cross Reference Chart

3PS Series



Socket outlet

Note: Not all units are interchangeable

NHP - 3PS16	Contacts	Marechal - DS 1	Eaton - CH 1
3PS1D1NE01	1P+N+E	3114015	CH1D1NE01
3PS1D30E01	3P+E	3114013	CH1D30E01
3PS1D3NE01	3P+N+E	3114017	CH1D3NE01
3PS16D1NE01P	1P+N+E+2P	3114015972	CH1D1NE01P
3PS16D30E01P	3P+E+2P	3114013972	CH1D30E01P
3PS16D3NE01P	3P+N+E+2P	3114017972	CH1D3NE01P
NHP - 3PS32	Contacts	Marechal - DS 3	Eaton - CH 3
3PS3D1NE01	1P+N+E	3134015	CH3D1NE01
3PS3D30E01	3P+E	3134013	CH3D30E01
3PS3D3NE01	3P+N+E	3134017	CH3D3NE01
3PS32D1NE01P	1P+N+E+2P	3134015972	CH3D1NE01P
3PS32D30E01P	3P+E+2P	3134013972	CH3D30E01P
3PS32D3NE01P	3P+N+E+2P	3134017972	CH3D3NE01P
NHP - 3PS63	Contacts	Marechal - DS 6	Eaton - CH 6
3PS6D1NE01	1P+N+E	3164015	CH6D1NE01
3PS6D30E01	3P+E	3164013	CH6D30E01
3PS6D3NE01	3P+N+E	3164017	CH6D3NE01
3PS63D1NE01P	1P+N+E+2P	3164015972	CH6D1NE01P
3PS63D30E01P	3P+E+2P	3164013972	CH6D30E01P
3PS63D3NE01P	3P+N+E+2P	3164017972	CH6D3NE01P
NHP - 3PS125	Contacts	Marechal - DS 9	Eaton - CH 9
3PS9D1NE01	1P+N+E	3194015	CH9D1NE01
3PS9D30E01	3P+E	3194013	CH9D30E01
3PS9D3NE01	3P+N+E	3194017	CH9D3NE01
3PS9D1NE01P	1P+N+E+2P	3194015972	CH9D1NE01P
3PS9D30E01P	3P+E+2P	3194013172	CH9D30E01P
3PS9D3NE01P	3P+N+E+2P	3194017972	CH9D3NE01P
NHP - 3PS200	Contacts	Marechal - DS 2	Eaton - CH 2
3PS2D1NE01	1P+N+E	3924015	CH2D1NE01
3PS2D30E01	3P+E	3924013	CH2D30E01
3PS2D3NE01	3P+N+E	3924017	CH2D3NE01
3PS2D1NE01P	1P+N+E+2P	3924015972	CH2D1NE01P
3PS2D30E01P	3P+E+2P	3924013972	CH2D30E01P
3PS2D3NE01P	3P+N+E+2P	3924017972	CH2D3NE01P

Cross Reference Chart

3PS Series




Appliance inlet

Note: Not all units are interchangeable

NHP - 3PS16	Contacts	Marechal - DS 1	Eaton - CH 1
3PS1A1NE01	1P+N+E	3118015	CH1A1NE01
3PS1A30E01	3P+E	3118013	CH1A30E01
3PS1A3NE01	3P+N+E	3118017	CH1A3NE01
3PS16A1NE01P	1P+N+E+2P	3118015972	CH1A1NE01P
3PS16A30E01P	3P+E+2P	3118013972	CH1A30E01P
3PS16A3NE01P	3P+N+E+2P	3118017972	CH1A3NE01P
NHP - 3PS32	Contacts	Marechal - DS 3	Eaton - CH 3
3PS3A1NE01	1P+N+E	3138015	CH3A1NE01
3PS3A30E01	3P+E	3138013	CH3A30E01
3PS3A3NE01	3P+N+E	3138017	CH3A3NE01
3PS32A1NE01P	1P+N+E+2P	3138015972	CH3A1NE01P
3PS32A30E01P	3P+E+2P	3138013972	CH3A30E01P
3PS32A3NE01P	3P+N+E+2P	3138017972	CH3A3NE01P
NHP - 3PS63	Contacts	Marechal - DS 6	Eaton - CH 6
3PS6A1NE01	1P+N+E	3168015	CH6A1NE01
3PS6A30E01	3P+E	3168013	CH6A30E01
3PS6A3NE01	3P+N+E	3168017	CH6A3NE01
3PS63A1NE01P	1P+N+E+2P	3168015972	CH6A1NE01P
3PS63A30E01P	3P+E+2P	3168013972	CH6A30E01P
3PS63A3NE01P	3P+N+E+2P	3168017972	CH6A3NE01P
NHP - 3PS125	Contacts	Marechal - DS 9	Eaton - CH 9
3PS9A1NE01	1P+N+E	3198015	CH9A1NE01
3PS9A30E01	3P+E	3198013	CH9A30E01
3PS9A3NE01	3P+N+E	3198017	CH9A3NE01
3PS9A1NE01P	1P+N+E+2P	3198015972	CH9A1NE01P
3PS9A30E01P	3P+E+2P	3198013172	CH9A30E01P
3PS9A3NE01P	3P+N+E+2P	3198017972	CH9A3NE01P
NHP - 3PS200	Contacts	Marechal - DS 2	Eaton - CH 2
3PS2A1NE01	1P+N+E	3928015	CH2A1NE01
3PS2A30E01	3P+E	3928013	CH2A30E01
3PS2A3NE01	3P+N+E	3928017	CH2A3NE01
3PS2A1NE01P	1P+N+E+2P	3928015972	CH2A1NE01P
3PS2A30E01P	3P+E+2P	3928013972	CH2A30E01P
3PS2A3NE01P	3P+N+E+2P	3928017972	CH2A3NE01P

Cross Reference Chart

3PS Series

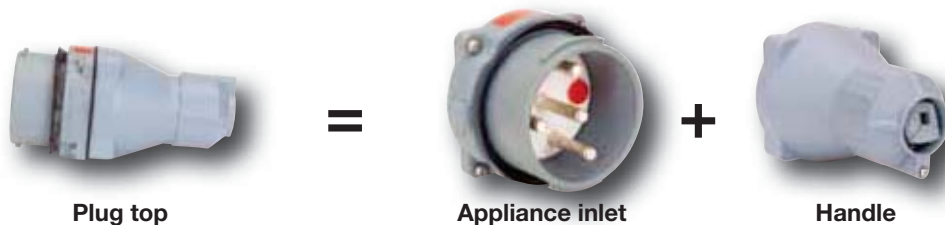

Appliance inlet		Handle			
NHP - 3PS16				Contacts	Eaton - CH 1
3PS1A1NE01	+	3PS1G		1P+N+E	CH1P1NE01
3PS1A30E01	+	3PS1G		3P+E	CH1P30E01
3PS1A3NE01	+	3PS1G		3P+N+E	CH1P3NE01
3PS16A1NE01P	+	3PS1G		1P+N+E+2P	CH1P1NE01P
3PS16A30E01P	+	3PS1G		3P+E+2P	CH1P30E01P
3PS16A3NE01P	+	3PS1G		3P+N+E+2P	CH1P3NE01P
NHP - 3PS32				Contacts	Eaton - CH 3
3PS3A1NE01	+	3PS3G		1P+N+E	CH3P1NE01
3PS3A30E01	+	3PS3G		3P+E	CH3P30E01
3PS3A3NE01	+	3PS3G		3P+N+E	CH3P3NE01
3PS32A1NE01P	+	3PS3G		1P+N+E+2P	CH3P1NE01P
3PS32A30E01P	+	3PS3G		3P+E+2P	CH3P30E01P
3PS32A3NE01P	+	3PS3G		3P+N+E+2P	CH3P3NE01P
NHP - 3PS63				Contacts	Eaton - CH 6
3PS6A1NE01	+	3PS6G		1P+N+E	CH6P1NE01
3PS6A30E01	+	3PS6G		3P+E	CH6P30E01
3PS6A3NE01	+	3PS6G		3P+N+E	CH6P3NE01
3PS63A1NE01P	+	3PS6G		1P+N+E+2P	CH6P1NE01P
3PS63A30E01P	+	3PS6G		3P+E+2P	CH6P30E01P
3PS63A3NE01P	+	3PS6G		3P+N+E+2P	CH6P3NE01P
NHP - 3PS125				Contacts	Eaton - CH 9
3PS9A1NE01	+	3PS9G		1P+N+E	CH9P1NE01
3PS9A30E01	+	3PS9G		3P+E	CH9P30E01
3PS9A3NE01	+	3PS9G		3P+N+E	CH9P3NE01
3PS9A1NE01P	+	3PS9G		1P+N+E+2P	CH9P1NE01P
3PS9A30E01P	+	3PS9G		3P+E+2P	CH9P30E01P
3PS9A3NE01P	+	3PS9G		3P+N+E+2P	CH9P3NE01P
NHP - 3PS200				Contacts	Eaton - CH 2
3PS2A1NE01	+	3PS2G		1P+N+E	CH2P1NE01
3PS2A30E01	+	3PS2G		3P+E	CH2P30E01
3PS2A3NE01	+	3PS2G		3P+N+E	CH2P3NE01
3PS2A1NE01P	+	3PS2G		1P+N+E+2P	CH2P1NE01P
3PS2A30E01P	+	3PS2G		3P+E+2P	CH2P30E01P
3PS2A3NE01P	+	3PS2G		3P+N+E+2P	CH2P3NE01P

Cross Reference Chart

3PS Series

Angled wall box 	NHP-3PS	Marechal - DS	Eaton - CH
	3PS1WA-S	311A053	CH1W
	3PS3WA-S	313A053	CH3W
	3PS6WA-S	316A053	CH6W
	3PS9WA-S	399A653	CH9W
	3PS2WA-S	392A053	CH2W
Incline sleeve 	NHP-3PS	Marechal - DS	Eaton - CH
	3PS1-LB	311A027	CH1AA
	3PS3-LB	313A027	CH3AA
	3PS6-LB	316A027	CH6AA
	3PS9-LB	319A027	CH9AA
	3PS2-LB	392A027	CH2AA
Handle standard gland 	NHP-3PS	Marechal - DS	Eaton - CH
	3PS1G	311A013	CH1H
	3PS3G	313A013	CH3H
	3PS6G	316A013	CH6H
	3PS9G	319A01303	CH9H
	3PS2G	392A01303	CH2H
Handle with removable gland 	NHP-3PS	Marechal - DS	Eaton - CH
	3PS1G-FP	311A253419	CH1HS
	3PS3G-FP	313A253420	CH3HS
	3PS6G-FP	316A253429	CH6HS
App. Inlet plug cap 	NHP-3PS	Marechal - DS	Eaton - CH
	3PS1-PC	311A126	CH1PC
	3PS3-PC	313A126	CH3PC
	3PS6-PC	316A126	CH6PC
	3PS9-PC	319A126	CH9PC
	3PS2-PC	312A126	CH2PC

Trademark List

ISO and Disconnect are trademarks of NHP Electrical Engineering Products Pty Ltd.

Trademarks not belonging to NHP Electrical Engineering Products Pty Ltd are property of their respective companies.

Your complete range of plugs and sockets

**Make the
Switch**



ISO

NHP

Industrial Strength Options

Better by design



PROCONNECT® Deconnector™ - The safest way to connect

For more details please contact your authorised electrical wholesaler.

Please scan the QR code
to download the PDF of
this brochure.



NISOPROCONAUSPL
© Copyright NHP 2012