

Compliances: FAA Advisory Circular 150/5390-27E Windsock
ICAO Annex 14, Volume II Heliports, Paragraph 5.1
UK CAA CAP 437



ATEX & IECEX Listed: Zones 1&2, T4 at -40 deg C to +55 deg C
ATEX & IECEX Listed: Ex II 2GD Ex db eb op is IIC T4 Gb IP66



A wind cone is used to visually indicate wind direction at airports and heliports. Point Lighting wind cones are installed on offshore helidecks, heliports, hospitals, and military bases around the world.

FAA Type	Size	Lighting	Power	Windsock	Rating	Options
PWC-806	1: 8-ft Sock FAA Size 1 4: 1.2m Sock ICAO	L: Lighted Style I	2: AC	ON: Orange Nylon RW: Red/White	AX: Zone 1 & Zone 2	OL: Obstacle Light FM: Flange Mount (page 2) SM: Stand Mount
Size 1: 8-ft sock has 18-inch diameter frame Size 4: 4-ft sock has 12-inch diameter frame						

All hardware is stainless steel 316

ATEX ZONE 1 & 2 LISTED
HIGH INTENSITY LED FLOODLIGHT
T4 RATED & IP66
-40 TO +55 DEGREE C


IECEX CERTIFICATE: IECEX ITS 18.0007X
ATEX CERTIFICATE: 2460 ITS 18 ATEX 103084X

Lumens in white light: 5,000
Temperature Rating: T4 -40 to +55 C
Voltage with -OL: 120-240V, 50/60 Hz
Power Consumption - Flood: 39 watts
Power Consumption - OL: 7 watts

SPARE PARTS

PL11429-1 Floodlight Assembly
PL11282-1 Obstacle Light
PL10063-CH Windsock Size 1
PL10996 Windsock Size 4
PL10289 Basket Subassembly Size 1

ATEX & IECEX WIND CONE
PWC-8061L-2-ON-AX

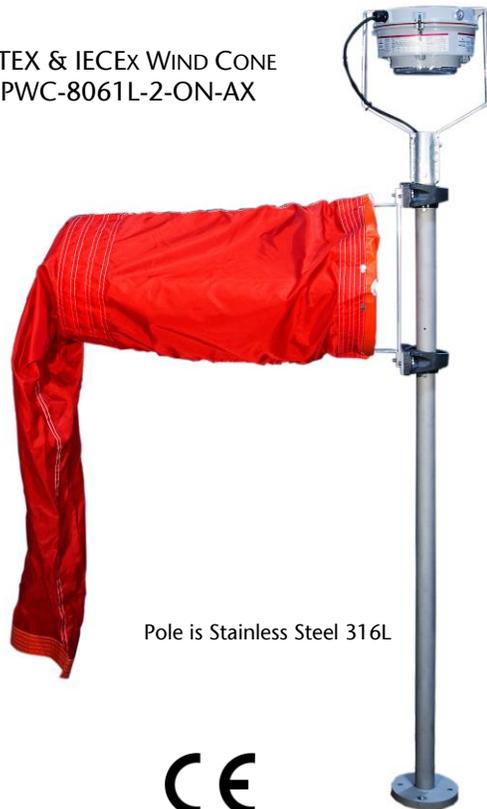





POINT
LIGHTING
CORPORATION

POINT WIND CONE
PWC-AX LED
ATEX & IECEX ZONE 1


OPTION -FM FLANGE MOUNT

ATEX & IECEX WIND CONE
PWC-8061L-2-ON-AX-FM

ATEX & IECEX WIND CONE
PWC-8061L-2-ON-AX-OL-SM

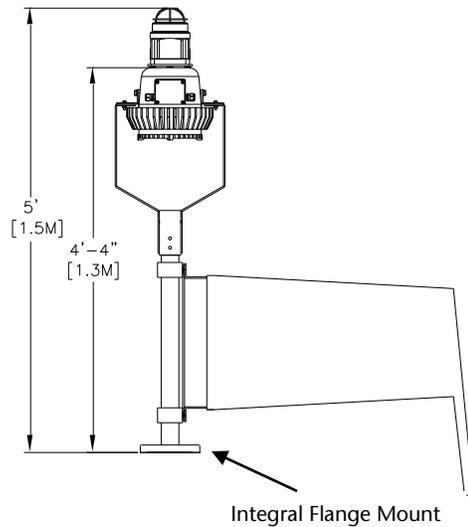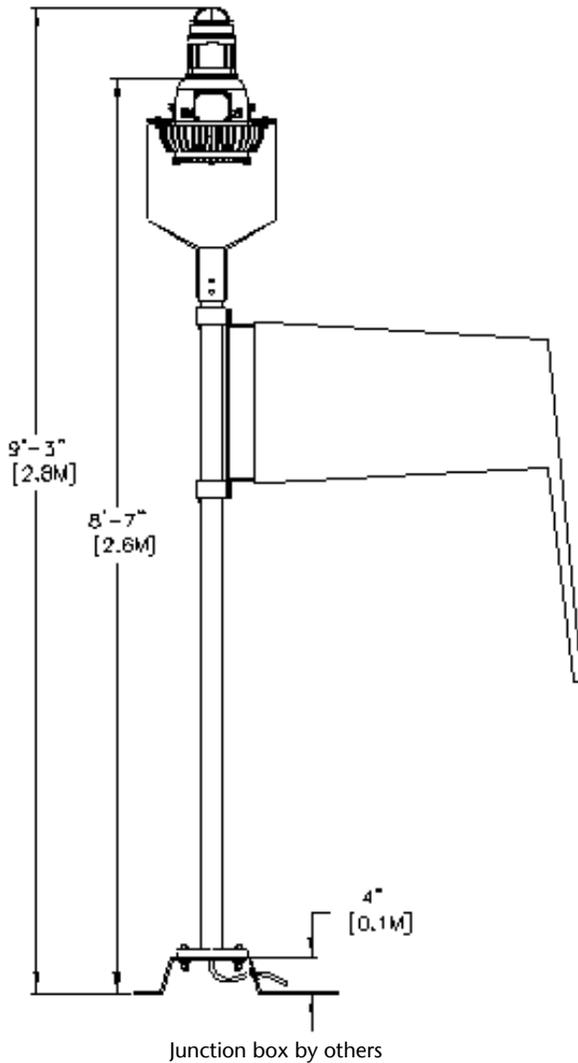

FLANGE MOUNT
BOLT PATTERN

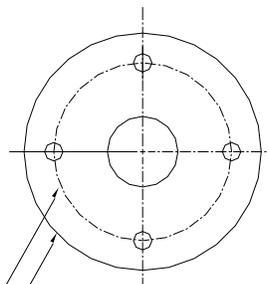

FLANGE DIAMETER:
8-INCH [203mm]
BOLT CIRCLE DIAMETER:
6-INCH [152mm]
MOUNTING HOLES DIAMETER:
QTY 4: 9/16-INCH [14]



POINT WIND CONE PWC-EX LED CLASS I, DIVISION 2 & ZONE 2

Compliances: FAA Advisory Circular 150/5390-27E Windsock
 ICAO Annex 14, Volume II Heliports, Paragraph 5.1
 Transport Canada TP312, Chapter 5 Visual Aids
 UK CAA CAP 437 & American Bureau of Shipping (ABS)
 Listed Class I, Division 2, Groups A B C D, T4A at 65-deg C
 Listed Class I, Zone 2, Group IIC, T4 at 65-deg C, IP66/67
 Listed to UL 844 & UL 1598
 Listed to UL 1598A Marine Vessels
 Listed to CSA C22.2 No. 137-M1981 Canada

A wind cone is used to visually indicate wind direction at airports and heliports. Point Lighting wind cones are installed at offshore helidecks, heliport, hospitals, corporate headquarters and military bases around the world. UL & ETL listed Class I, Division 2 lighting is used for hazardous area requirements.

FAA Type	Size	Lighting	Power	Windsock	Rating	Options
PWC-806	1: 8-ft Sock FAA Size 1 4: 1.2m Sock ICAO	L: Lighted Style I	2: AC* * AC range is 108-250V; 50/60Hz	ON: Orange Nylon RW: Red/White	EX: Class I, Division 2 Zone 2	OL: Obstruction Light Class I, Div 2 (Zone 2) SM: Stand Mount FM: Flange Mount OL-DIR: OL for NVG

Size 1: 8-ft sock has 18-inch diameter frame
 Size 4: 4-ft sock per ICAO, PEMEX & HSAC

PWC-EX LED WIND CONE
 TYPE 806 CLASS I, DIVISION 2 (ZONE 2)
 SHOWN WITH OPTION -OL

Floodlight:

ABS Certificate Number: 18-HS1714308-PDA
 Power – Floodlight: 34 watts

Obstruction Light:

ABS Certificate Number: 15HS1325629-PDA
 Power – Obstruction: 2.1 watts

SPARE PARTS

- PL11428-1 Floodlight Assembly
- PL10063-CH Windsock Size 1
- PL10996 Windsock Size 4
- PL10289 Basket Subassembly Size 1




Pole is Stainless Steel 316L



POINT
LIGHTING
CORPORATION

POINT WIND CONE
PWC-EX LED
CLASS I, DIVISION 2 & ZONE 2

PWC-EX LED WIND CONE
TYPE 806 CLASS I, DIVISION 2
TYPE 806 CLASS I, ZONE 2

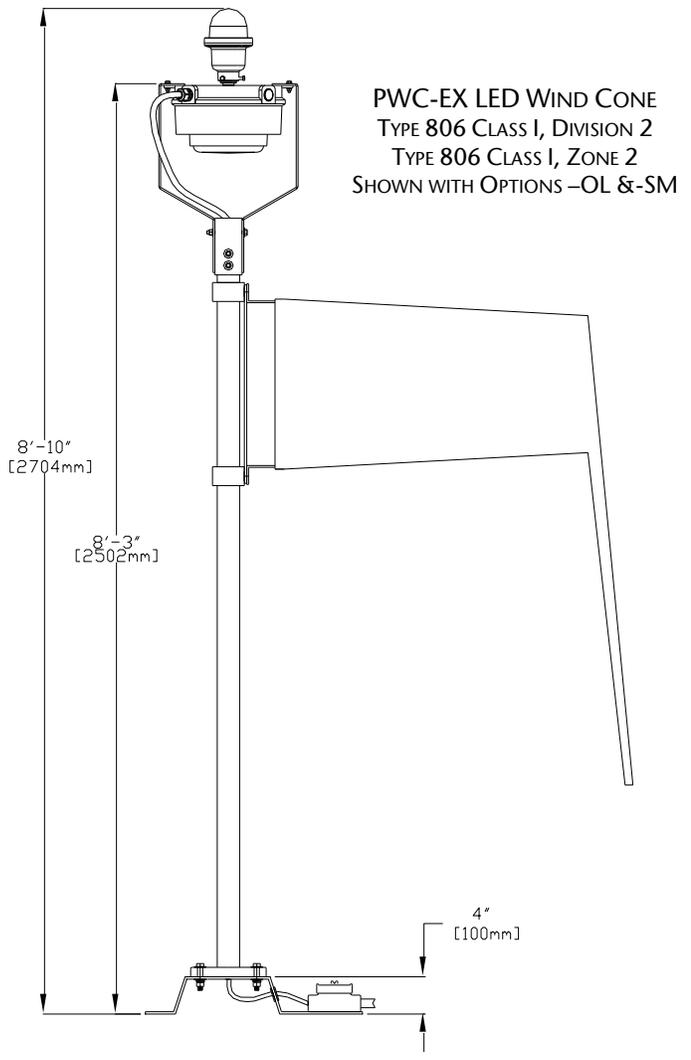





POINT LIGHTING CORPORATION


POINT WIND CONE PWC-EX LED CLASS I, DIVISION 2 & ZONE 2

OPTION -FM FLANGE MOUNT


CLASS I, DIVISION 2 WIND CONE
PWC-8061L-2-ON-EX-FM-OL

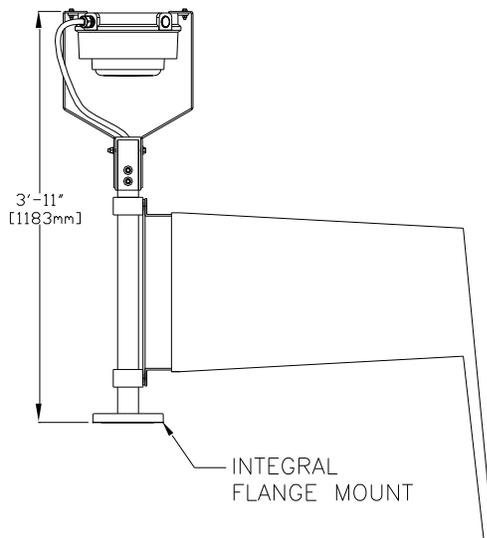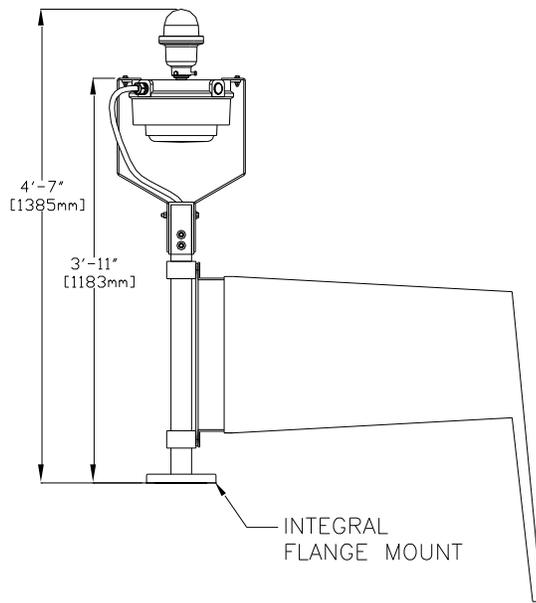

LIGHTING ASSEMBLY

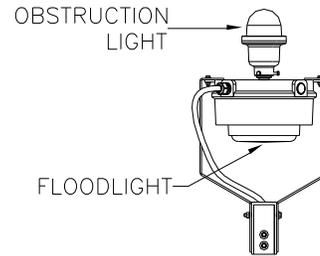

FLANGE MOUNT
BOLT PATTERN

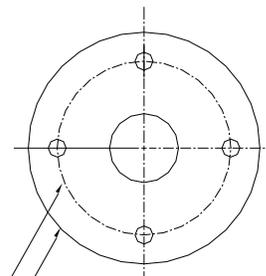

FLANGE DIAMETER:
8-INCH [203mm]
BOLT CIRCLE DIAMETER:
6-INCH [152mm]
MOUNTING HOLES DIAMETER:
QTY 4: 9/16-INCH [14]