



## Futura Street Light

Typical applications include:

- Street lighting
- Area lighting
- Walkways
- Residential & Campus
- Car Parks





**constellation**  
LIGHTING UK & EUROPE



# technical specifications

## Futura Street Light – 30W/45W

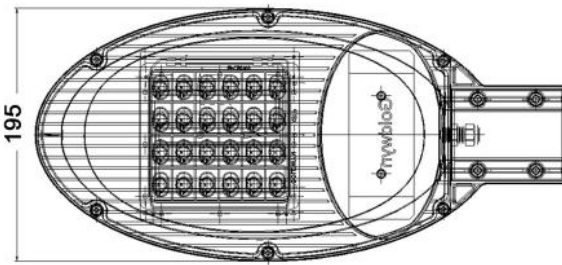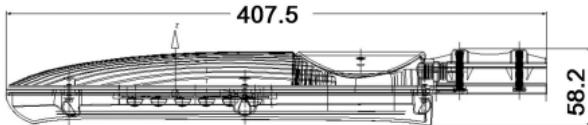

**Input Voltage** 100 to 277V AC 50/60HZ

**Operating Temperature** -20° C to 50° C

**Ingress Protection** IP65

**Color Temperature** 6000K

**Color Rendering Index** >80

**Lifespan** Typically 80,000 hrs\*

**Number of LED's** 24

**Total Power Consumption** 30W  
45W

**Lumen Output** 2600lm  
3900lm

**Power Factor** >0.9

**Harmonics** EN61000-3-2 and 61000-3-3

**Safety Standard** EN60598

**EMC/ EMI Standard** EN 61547 / EN55015

Distributed by:



011 (281) 882-8300  
www.sourceiex.com

\* LED life is quantified by equity depreciation which typically occurs at 50,000 + hours.

Constellation Lighting reserves the right to alter product offerings and specifications at any time without notice. This publication may include technical inaccuracies.